



QUICK START GUIDE

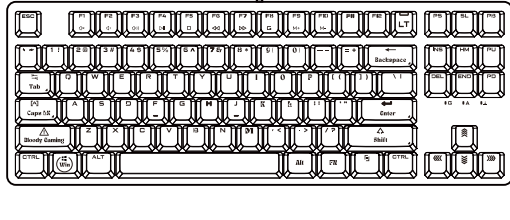

WHAT'S IN THE BOX

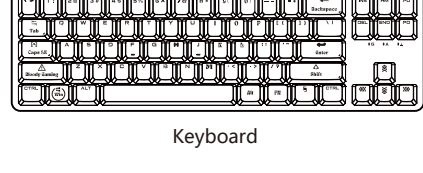


Keyboard



PBT Keycaps



Keycap Puller




USB Type-C Cable



User Manual



KNOW YOUR PRODUCT

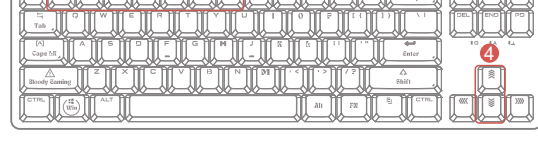

- 1 LT 4 Level Variable Speed Keys
- 2 FN Multimedia Hotkeys
- 3 Lighting Effects Switching
- 4 Backlit Brightness Adjustable

INSTALLATION

Connect the Type-C plug to the keyboard and the USB plug to the computer.
(Note: Using a USB hub or extension cable for connection is not recommended.)

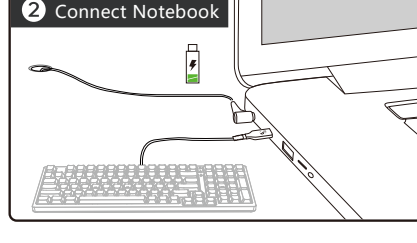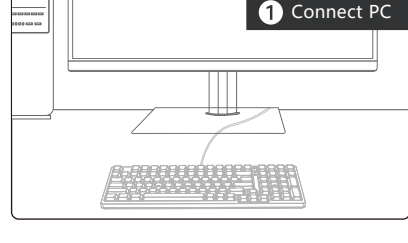

LT 4 CUSTOMIZABLE VARIABLE SPEED PROFILES

Easily switch the optical switch actuation point by pressing the Variable Speed key in sequence. Customize up to 3 profiles using software, with an additional "Alpha Gamer" Precision Customization option tailored for advanced users.

	Preset 4-Level Variable Speed	Software Customization 4-Level Variable Speed
	Profile 1 Full Key 2.0mm	Profile 1 Full Key Customization
	Profile 2 Full Key 1.6mm	Profile 2 Full Key Customization
	Profile 3 Full Key 1.2mm	Profile 3 Full Key Customization
	Alpha Gamer Full Keys 2.0mm / Independent Keys 1.4mm	Alpha Gamer Full Keys / Independent Keys Customization

KEYDOMINATOR EDITING SOFTWARE




SOFTWARE DOWNLOAD

For optimal product performance and access to advanced customization features, please download and install the software from <http://bloody.com/en/download.php>.

- 1 **Keystroke Setting**
Customize keyboard function emulation, programmed keys, shortcut keys, and other settings to suit your preferences.
- 2 **Actuation Point**
Fine-tune the travel distance setting of LT optical switches for accurate typing and gaming experiences.
- 3 **Macro Editor II**
A player-centric programming platform tailored for users with programming expertise.
- 4 **Combination Setting**
A user-friendly player programming platform ideal for players without programming expertise, allowing for the creation of simple programming functions.
- 5 **Ultra Combo**
Access settings for advanced software and hardware functions.

FULL KEYBOARD AREA CUSTOMIZATION

Access **LT Optical Travel Configuration** setting by clicking 'Actuation Point' in the software.

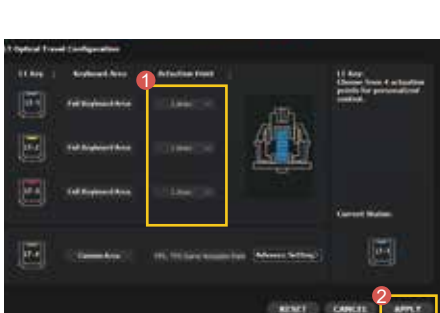

- Configuration Example: Adjust the factory preset travel distances for LT-1, LT-2, and LT-3 to 2.6mm, 1.8mm, and 1.6mm respectively.**
- 1 Locate 'Actuation Point' in the software interface. Customize the **LT Key** actuation points according to the following steps:
A: Select 2.6mm from 2.0mm for LT-1.
B: Select 1.8mm from 1.6mm for LT-2.
C: Select 1.6mm from 1.2mm for LT-3.
 - 2 Click **APPLY**, then press the **LT** button to switch between the three saved full keyboard area actuation points without needing extra drivers.

FULL-KEY INDEPENDENT CUSTOMIZATION

Access **LT Optical Travel Configuration** setting by clicking 'Actuation Point' in the software.



- Configuration Example: Customize the LT-4 default actuation point template to create a highly personalized game profile.**
- 1 Go to **Custom Area** to set the default actuation point template for the gaming category.
 - 2 Click **APPLY**, then use the **LT** button to toggle between the saved full-key independent variable speed actuation points without additional drivers.
 - 3 Click on 'Advanced Setting' to access the game actuation point editing platform and adjust the speed of both full-key and independent key actuation points for the game template.

ALPHA PLAYER CUSTOMIZATION

Game Template Configuration Example: Customize the actuation points of the WASD and space keys to 1.4mm for a game, while setting other keys to 2.0mm.

- 1 Go to 'Travel Distance' to name your FPS or TPS Game Actuation Point template. Once confirmed, a game template will be automatically generated. Then, proceed to adjust the **Full Keyboard Area** setting.
- 2 Set the **Full Keyboard Area** to 2.0mm, then proceed to configure the Single or Multiple Key settings.
- 3 Select **W/S/A/D** and the **<SPACE>** key to designate the actuation point as 1.4mm:
a Red key: Set the independent key actuation point to 1.4mm
b Black key: Set the full key actuation point to 2.0mm
- 4 Save in **File Management**, and the currently edited game template will be saved.



COMBINATION FN KEYS

- Default 7 Preset RGB Lighting Effects
- Mute, Volume -, Volume +, Play/Pause, Stop, Previous, Next
- Previous / Next Macro Profile
- Disable "Windows" Key
* The G LED Lights Up in Solid Red
- Lighting Brightness +/-

Q & A

- Question** Can the LT achieve 4-speed switching without drivers?
Answer Default LT actuation points include 2.0mm, 1.6mm, 1.2mm, with full key at 2.0mm and independent key at 1.4mm.
- Question** Can the four speeds of LT define their own actuation points for full key or multi-key input?
Answer Actuation points for both full key speed and full key independent speed can be customized through software.
- Question** Can I restore the default settings for the 4 LT speeds?
Answer Yes, simply click on the "Restore Defaults" button in the speed settings.
- Question** How to adjust the lighting brightness?
Answer Preset 4 levels of brightness, (High/Medium/Low/Off) by pressing + /

TECH SPEC

Switch Type	Alpha Optical Variable Speed Switch
Adjustable Actuation Point	9 Options 1.0mm ~2.6mm
Number of Keys	87 Keys + 1 LT Variable Speed Key
Switch Lifetime	100 Million keystrokes
Keycaps	Full Key PBT
Report Rate	1000 Hz
Onboard Memory	4M
RGB Backlit Effect	7 Lighting Effects
100% N-Key Rollover	Yes
Port	USB
Size	36 x 13.3 x 4 cm
Weight	963g (w/ cable), 893g (w/o cable)
System	Windows 7 / 8 / 8.1 / 10 / 11



www.Bloody.com



Scan for E-Manual